


# STRONGLINE

## Multifunctional aluminum operating column for indoor and outdoor use

- Column in 3 mm coated aluminum
- Finished in anthracite, RAL7016 textured varnish
- Easy installation
- Available at different heights
- No maintenance




Optional stainless steel version

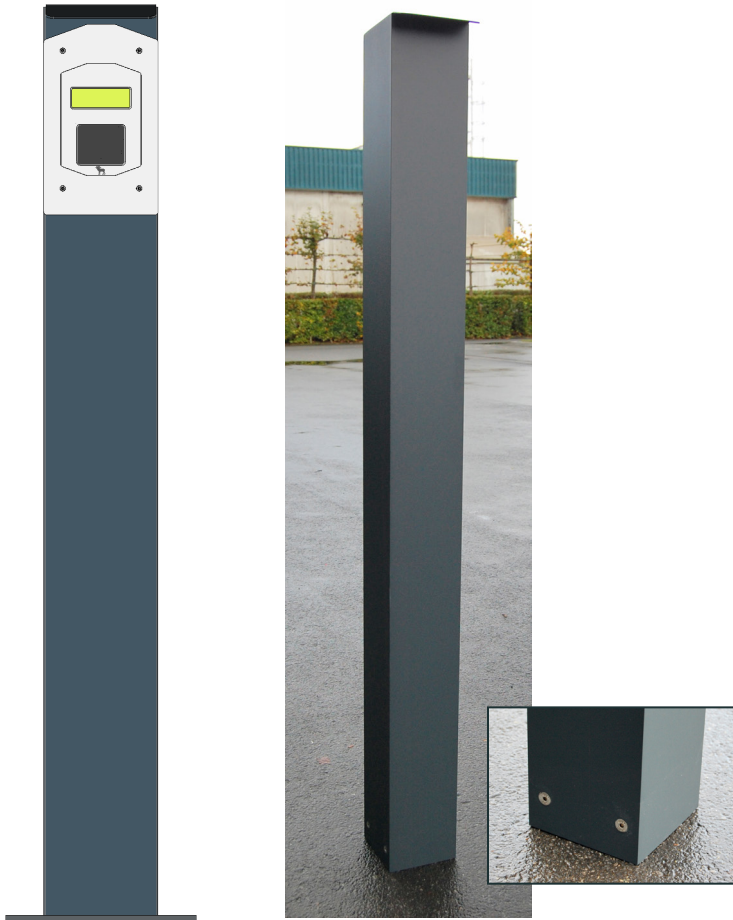

Possibility of installation with invisible base



Dimension base

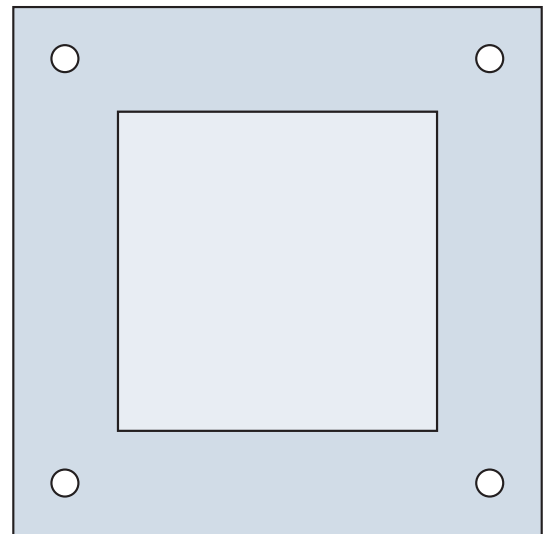

| Heights                                    | 1,2 m                                 | 1,5 m  | 1,8 m | 2,4 m |
|--|---------------------------------------|--------|-------|-------|
| Colour                                     | RAL7016 Textured varnish              |        |       |       |
| Housing                                    | Powdercoated aluminum, thickness 3 mm |        |       |       |
| Dimensions column                          | 150 x 150 mm                          |        |       |       |
| Max cutouts for Octoline modules           | 3                                     | 3      | 3     | 2 x 3 |
| Fixation to the underground                | With expansion bolts or threaded rods |        |       |       |
| Weight ±                                   | 7 kg                                  | 8,5 kg | 10 kg | 13 kg |
| Dimensions base                            | 250 mm x 250 mm                       |        |       |       |
| IP-range                                   | IP55                                  |        |       |       |
| Dimensions of optional lockable rear hatch | 105 x 370 mm                          |        |       |       |
| Warranty                                   | 2 years                               |        |       |       |



## Dimensions

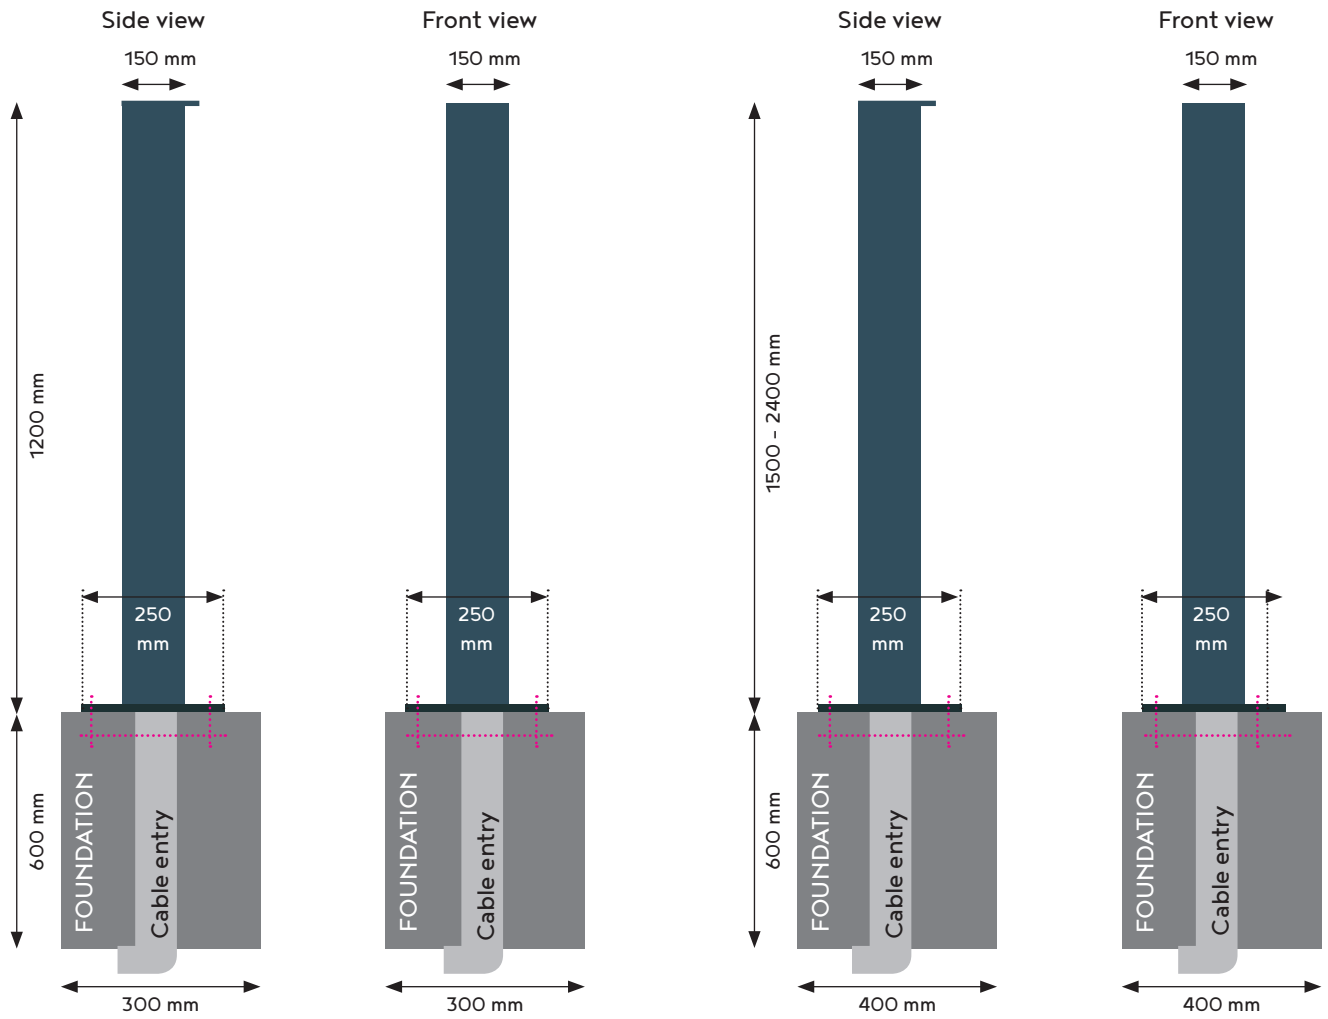

Positioning mold center  
distance 200 x 200 mm

